


# Leica CloudWorx 2.1 for PDMS

## Point cloud plug-in software

PDMS  
treats point  
clouds in the  
same manner  
as other  
modeled items  
for clashing

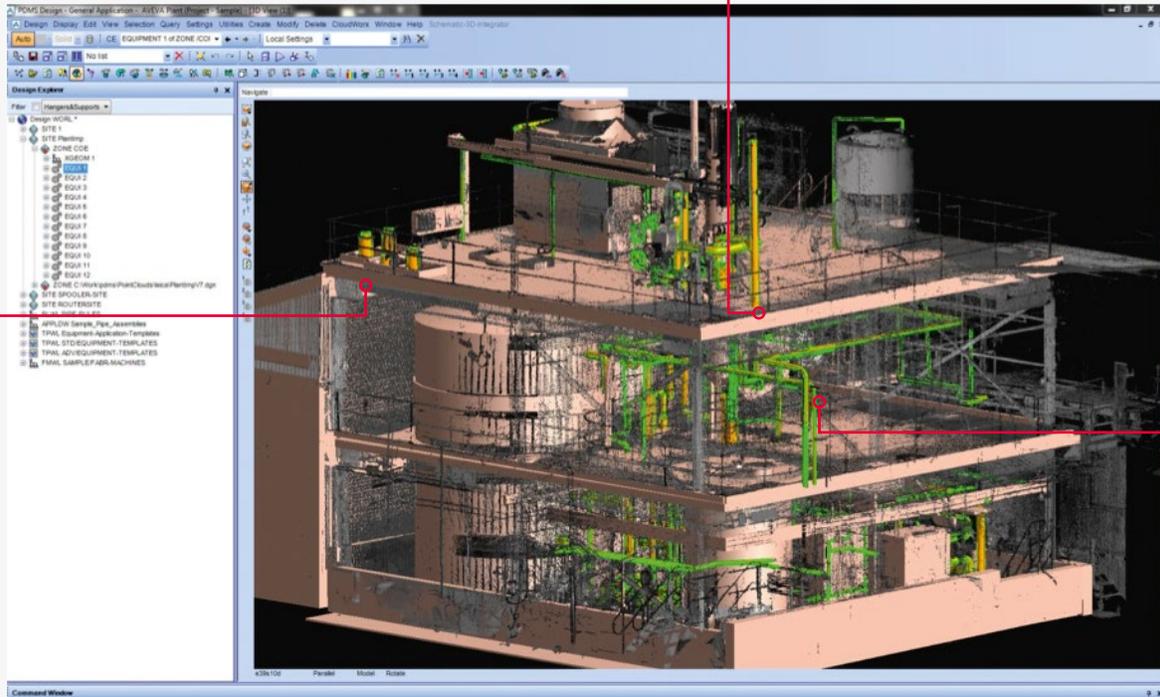

### Efficient management and use of as-built laser scan data

Leica CloudWorx 2.1 for PDMS is a plug-in for efficiently manipulating, as-built point cloud data – captured by laser scanners – directly within PDMS for better retrofit design, construction and operations. It provides a virtual site within PDMS, for greater confidence in assessing potential construction and operational impacts of a new design.

Users operate in the familiar PDMS interface, shortening the learning curve for working with point clouds. The Leica CloudWorx tools and powerful Leica Cyclone and Leica JetStream point cloud engines and database architecture let users efficiently visualize and work with large data sets. Users benefit from complete, accurate laser scan data to conceive designs,

check proposed designs against existing conditions, create as-built models, perform critical construction & fabrication QA, and more ... all directly within PDMS.


### Features and Benefits

- New! Steel fitter with standard catalog support
- 3D object exchange between Cyclone and PDMS
- Fast manipulation of scan data
- Slices, Half-Space Sections, and Limit Boxes
- Automatic pipe center D-points
- Accurate tie-ins, clash checking and reporting
- Accurate Find Flange Work Point tool
- Direct measurements from point clouds
- Multi-user simultaneous network access
- Supports any laser scanner

# Leica CloudWorx 2.1 for PDMS



Powerful TruSpace viewing allows for fast easy navigation of the point cloud driven from the TruSpace Viewer window.

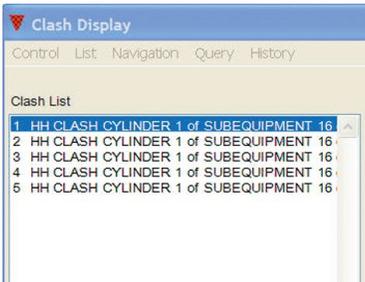

Using the standard PDMS clashing tools users can easily find critical interferences of new design work compared to the point cloud as-built data. Here a new pipe is seen to be clashing with a few large pipes in the scan just above the vessel.

## Transfer models from Cyclone to PDMS and back again with ease

The PDMS COE transfer utility now enables the quick transfer of models. Cyclone models can be imported into PDMS for interference checking, tie point inspection and retro fit management. PDMS models can be exported into Cyclone, modified, updated and/or published to TruViews for real-time field inspection. Models exported from PDMS are exported as un-intelligent primitives, but have all the accurate dimensioning and tie point locations you need for inspection and retro fit.

## Powerful point cloud management & measurement

Users can quickly, efficiently, and effectively manage vast amounts of point cloud data. "Cutplane Slices and Half-Space Sections" and/or "Limit Boxes" provide a quick and easy way to navigate point cloud data. Measurements are taken using familiar PDMS measuring tools.

## 3D as-built modeling

Pipes and Pipe center D-Points are automatically generated by selecting a single scan point on the pipe surface. Using the point cloud, D-Points and PDMS 3D modeling tools, users can create catalog-based intelligent as-built piping systems, structures, duct work, electrical tray systems, vessels and equipment. Also box shapes can be quickly created by picking on 2-3 planes of the box.

## Automated point cloud clash detection and reporting

Clash detecting against point clouds with CloudWorx is performed using PDMS' own automated clashing and reporting tools. Users can automatically detect clashes between modeled objects and point clouds, based on a user's own defined setting. All interfering points within a user-defined region are visually highlighted and itemized.

## Versatile support of multiple scanner formats

AVEVA users can take advantage of spatial scan data from any laser scanner via industry-standard ASCII-based data formats. In addition, Leica CloudWorx for PDMS directly accepts, without any data format conversion steps, compact native data formats from the industry's most popular scanners. These include all models of Leica Geosystems HDS time-of-flight and phase-based laser scanners.

LEICA CLOUDWORX 2.1 FOR PDMS*		MINIMUM SPECIFICATIONS	RECOMMENDED SPECIFICATIONS
<b>Large point cloud mgt</b>	3D limit boxes, slices, interactive visualization of massive data Connects to Cyclone or JetStream Database Technology for fast, efficient point cloud management	<b>Processor:</b> 2 GHz Dual Core processor or better <b>RAM:</b> 2 GB (4 GB for Windows Vista or Windows7)	<b>Processor:</b> 3.0 GHz Quad Core w/ Hyper-threading or higher <b>RAM:</b> 32 GB's or more 64 bit OS <b>Hard disk:</b> 500 GB SSD Drive
<b>Rendering</b>	Level of Detail (LOD) graphics, "Single pick" point cloud density control	<b>Hard disk:</b> 40 GB	<b>Large project disk option:</b> RAID 5, 6, or 10 w/ SATA or SAS drives
<b>Visualization</b>	TruSpace Viewer, Intensity mapping, True color, Limit boxes, slices, cut planes	<b>Display:</b> SVGA or OpenGL accelerated graphics card (with latest drivers)	<b>Display:</b> Nvidia GeForce 680 or ATI 7850 or better, with 2 GB's memory or more
<b>Measurement</b>	3D point coordinate, point-to-point, point-to-design entity	<b>Supported operating systems:</b> Windows 7 (32 or 64 bit) Windows 8 & 8.1 (64 bit) Windows 10 (64 bit)	<b>Operating system:</b> Microsoft Windows 7 - 64bit
<b>Modeling</b>	Steel fitter Region Grow Pipe and centerlines Region Grow box geometry PDMS Design Point Placement: Pipe Center D-Point (Includes actual calculated bore diameter attribute)	<b>File system:</b> NTFS <b>Supported PDMS versions:</b> PDMS 12.0 and earlier	<b>File system:</b> NTFS
<b>COE import Export</b>	Supported objects - Cylinder-Flange-Cone-Box-Planer Extrusion, Elbow		
<b>Interference Checking</b>	Check designs for interferences with point clouds using PDMS clash tool Highlight interfering points		
<b>Supported Formats</b>	Native Format - 3dd, scan (Leica and Cyra), zfc, zfs ASCII - pts, ptx, svy, txt, xyz		

Windows is a registered trademark of Microsoft Corporation. Other trademarks and trade names are those of their respective owners.

\* Reference the Leica Cyclone & CloudWorx Technical Specifications document for a complete listing of product specifications

Illustrations, descriptions and technical data are not binding. All rights reserved. Printed in Switzerland. - Copyright Leica Geosystems AG, Heerbrugg, Switzerland, 2014. 753315enus - 06.16